

DRAWINGS ATTACHED.

Inventor:—DERRICK JOHN SILVER.

927,251



Date of filing Complete Specification : April 22, 1959.

Application Date : April 23, 1958. No. 12 34/58.

Complete Specification Published : May 29, 1963.

Index at Acceptance : —Class 146(3), P11(B:D2:E2).

International Classification :—B43c.

COMPLETE SPECIFICATION.

Improvements in or relating to Fountain Pens.

We, MENTMORE MANUFACTURING CO. LIMITED, a Company registered under the laws of Great Britain, of Platignum House, Six Hills Way, Stevenage, Hertfordshire (formerly of Platignum House, Tudor Grove, London, E.9), do hereby declare the invention, for which we pray that a patent may be granted to us, and the method by which it is to be performed, to be particularly described in and by the following statement:—

This invention relates to fountain pens of the kind (hereinafter referred to as "the kind specified") in which capillary action alone is utilised for filling the ink reservoir, for retaining ink therein and for feeding ink from the reservoir to a writing surface when the pen is in use, the reservoir being provided with a filling composed of woven, knitted or other fabric formed from fibres which may be either capable or incapable of themselves absorbing ink. The filling may be in the form of a stack of discs cut from the fabric, for example.

It is usual in such pens to provide a wick of braided or woven fibres which is in close contact with the nib of the pen and also with the ink-storing filling of the reservoir, this wick performing the function of the feed-bar in a fountain pen of the well-known form which is adapted to be filled with ink by suction or some other means not relying solely on capillary action.

This wick-feed is not entirely satisfactory because the rate of travel of the ink along the same is much lower than can be secured with a conventional feed-bar and because the material of the wick-feed is liable to become progressively less absorbent during the life of the pen due to clogging of its interstices with solid constituents of the ink. In addition, the high degree of capillarity of the wick-feed necessitates greater accuracy in the formation of the slit in the nib, which

slit must be narrower than is required in most conventional pens.

The chief difficulty in attempting to provide a feed-bar formed from a solid material such as vulcanite or one of the plastics for use in a pen of the kind specified stems from the necessity for matching the ink-feed channels or grooves of the feed-bar to the capillary filling of the reservoir in such a way that free and easy transfer of ink from the one to the other can occur. The dimensional matching of the width of the channels or grooves to the capillary filling has proved to be so critical that no commercially satisfactory feed-bars have yet been produced for such pens.

It is the object of the present invention to provide a solution of this difficulty.

According to the invention a solid feed-bar for a fountain pen of the kind specified is formed in at least two separate parts which are placed together side-by-side to leave a longitudinally extending capillary ink-feeding gap between them and the transverse dimension of the gap is determined by sandwiching between the adjacent faces of the parts a sheet of the fabric to be employed to constitute the filling of the reservoir of the pen.

In this way it is ensured that the capillarity of the ink-feeding gap provided by the assembled feed-bar is closely similar to the capillarity of the filling for the reservoir so that ink will pass freely from the gap to the filling and vice versa. Moreover, the ink will travel at a sufficiently high rate along the feed-bar to ensure that an adequate supply of ink is always available at the nib slit whenever the pen is required for use.

The filling of the reservoir may be a stack of a large number of discs formed from an ink-absorbent material, such as cellulose or cotton, but it is preferred to employ a stack

45
50
55
60
65
70
75
80
85

of discs formed from a fabric composed of fibres which are themselves incapable of absorbing ink, such as nylon fibres. The nib section of the pen may be filled with a spirally rolled length of fabric instead of with stuck discs. This rolled length may be wound around a portion of the feed-bar and may constitute an extension of the sheet of fabric sandwiched between the parts of the bar.

The co-operating parts of the feed-bar according to the invention may be held in assembled relation by inserting them into the mouth of the nib section or they may be secured together by any suitable means so that the feed-bar may be handled conveniently as a unit.

An example of a fountain pen embodying the invention will now be described in greater detail with reference to the accompanying drawings, wherein:—

Fig. 1 is a longitudinal section of the pen with its nib-protecting cap removed;

Fig. 2 is a section taken on the line II—II of Fig. 1;

Fig. 3 is a section taken on the line III—III of Fig. 1;

Fig. 4 is a front elevation showing the two parts of the feed-bar embodied in the pen of Fig. 1;

Fig. 5 is a side elevation of one of the parts showing the inner face thereof;

Fig. 6 is a front elevation showing the parts of Fig. 4 as they would appear when in position in the pen; and

Fig. 7 is a section taken on the line VII—VII of Fig. 1.

The fountain pen shown comprises a barrel 1 and nib-section 2 which are connected together at a screw-threaded joint 3 with the interposition of a ring 4 for engagement by the cap of the pen when this is applied. The barrel 1 is closed at the end remote from the joint 3 and has a portion of its length filled with a stack of fabric discs 5 held in place between retaining rings 6 each having one of the fabric discs secured thereto. The inner ring 6 abuts against a shoulder 7 formed between the wall of the fabric-filled portion of the barrel 1 and the wall of a slightly narrower air chamber 8 which is yet of such a cross-sectional area that ink cannot form a stable meniscus therein. An air vent 9 formed in the wall of the barrel is fitted with a length of plastics tube 10 which extends radially inwards to about the axis of the chamber 8 to constitute an ink baffle.

In the nib-section of the pen is accommodated a further filling of fabric in the form of a spiral roll 11 which has its one end in firm contact with the endmost disc 5 of the stack in the barrel 1 and its other end in contact with the inner annular face of a collar 13 on a feed-bar composed of two co-operating parts 12a and 12b.

The parts of the feed-bar, when placed together with their flat inner faces facing each other but spaced apart by a short distance corresponding to the desired width of a capillary ink-feeding passage, produce a feed-bar resembling that of a conventional fountain pen. There is a portion extending forwards from the collar 13 which is of substantially cylindrical shape at 14, adjacent to the collar but is tapered off from one side towards its tip to produce the inclined face 15. Extending rearwards from the collar 13 is a substantially cylindrical rod-like portion 16 of smaller diameter than the forward portion and of a length approximately equal to that of the cavity in the nib-section which is filled by the rolled fabric 11.

In order that the width of the capillary ink-feeding passage 17 left between the two parts of the feed-bar may be correctly matched to the capillary filling 11 of the nib-section, the spacing apart of the two parts 12a, 12b of the feed-bar is determined by sandwiching between them a layer of the fabric utilised for making this filling. Although the sandwiched layer of fabric could be arranged to extend for the full length of the capillary passage 17, it is preferred to arrange it at the rearward end only of the feed-bar so that the passage 17 may be narrowed towards the tip of the feed-bar by pressing the parts of the latter together.

In the example illustrated, the sandwiched layer of fabric is the inner end 11a of the roll 11, the fabric being rolled around the rod-like part 16 of the composite feed-bar and the capillary passage 17 being filled with the sandwiched layer from the free end of the part 16 down to the collar 13.

The two parts of the feed-bar could be secured together by any suitable means but a preferred arrangement is that illustrated. In this case the nib end of the nib-section is formed with an axially directed cylindrical passage 18 adapted to receive the cylindrical forward portion 14 of the feed-bar together with the shank of the nib 9 as a tight press fit. The feed-bar is inserted into the nib-section 2 through the screw-threaded end thereof and advanced until the nib 19 can be positioned on the projecting tapered forward end of the bar from the nib end of the nib-section. The bar is then forced home and the tight grip exerted on the forward end of the bar by the encircling portion of the nib-section causes the tips of the parts 12a and 12b to come into contact, with a consequent progressive narrowing of the capillary passage 17 along the length thereof from the zone where its width is determined by the sandwiched layer 11a of fabric.

The collar 13 forms a stop limiting the extent to which the feed-bar may be forced through the passage 18 in the nib-section and the nib 19 is naturally arranged on the feed-

- bar so that the passage 17 in the latter extends longitudinally beneath the usual slit in the nib with its one pair of edges spaced but a short distance from the edges of the nib-slit. As shown, this pair of edges of the passage 17 are rabbeted from the collar 13 almost to the free end of the feed-bar in order to form an auxiliary capillary channel 20 beneath the nib.
- It will be understood that the fountain pen is filled with a charge of ink merely by immersing the nib and feed-bar in a supply of the ink for a sufficient period of time, the ink being elevated into the interstices of the fabric fillings 5 and 11 by capillary action. The capillarity of the passage 17 in the feed-bar is closely similar to that of the fabric fillings and ink will pass freely from the passage to the filling and *vice versa*.
- WHAT WE CLAIM IS:—**
1. A solid feed-bar for a fountain pen of the kind specified formed in at least two separate parts which are placed together side-by-side to leave a longitudinally extending capillary ink-feeding gap between them, the transverse dimension of the gap being determined by sandwiching between the adjacent faces of the parts a sheet of the fabric to be employed to constitute the filling of the reservoir of the pen.
 2. A fountain pen of the kind specified embodying a solid feed-bar formed in at least two separate parts which are placed together side-by-side to leave a longitudinally extending capillary ink-feeding gap between them, a sheet of the fabric to be employed to constitute the filling of the reservoir of the pen being sandwiched between the adjacent faces of the parts in order to determine the transverse dimension of the gap.
 3. A fountain pen according to Claim 2, wherein the filling of the reservoir is a stack of a large number of discs of the fabric.
 4. A fountain pen according to Claim 2 or 3, wherein the nib-section of the pen contains a spirally rolled length of the fabric.
 5. A fountain pen according to Claim 4, wherein the rolled length of fabric is wound around a portion of the feed-bar.
 6. A fountain pen according to Claim 5, wherein the rolled length of fabric constitutes an extension of the sheet of fabric sandwiched between the parts of the feed-bar.
 7. A fountain pen according to any one of Claims 2 to 6, wherein the parts of the feed-bar are held in assembled relation by inserting them into the mouth of the nib-section.
 8. A fountain pen substantially as herein described with reference to the accompanying drawings.

For the Applicants,
RAWORTH, MOSS & COOK,
 Chartered Patent Agents,
 38 Sydenham Road, Croydon, Surrey,
 and
 75 Victoria Street, London, S.W.1.

Reference has been directed in pursuance of Section 9, Subsection (1) of the Patents Act, 1949, to Patent No. 732,463.

This drawing is a reproduction of the Original on a reduced scale

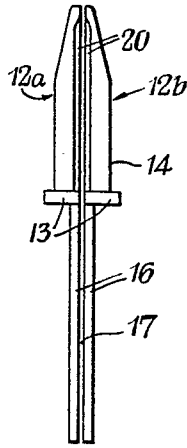
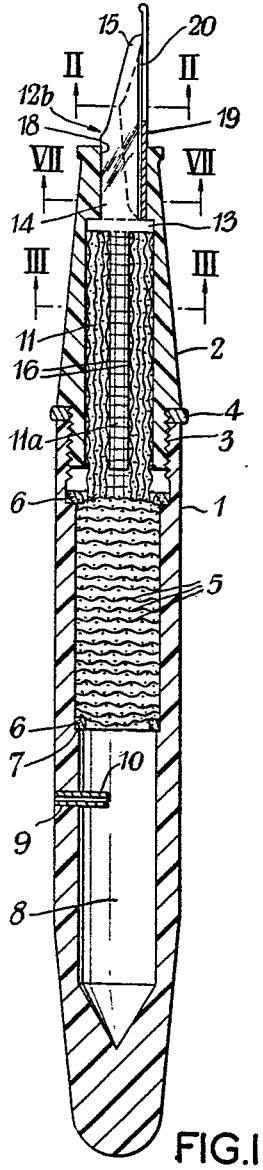


FIG. 4

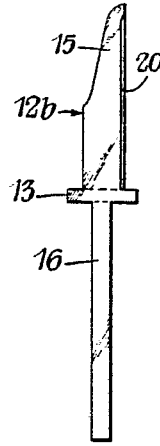


FIG. 5




FIG. 2

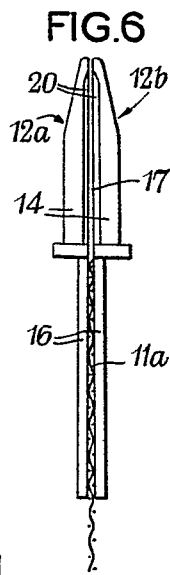


FIG. 6




FIG. 3




FIG. 7